

PISKO ROOF WALKWAY FOR STANDING SEAM ROOF, PISKO UNISEAM

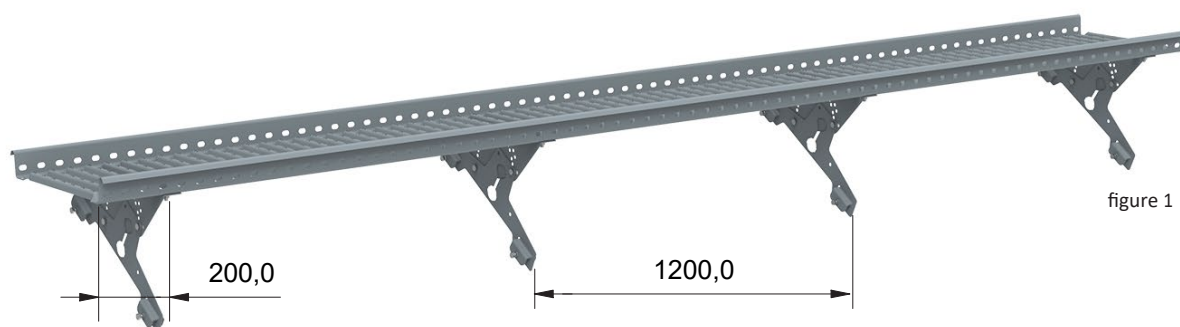


figure 1

INSTALLATION

Pisko roof walkway can be installed on roofs with a roof slope of 9-45 degrees.

The roof walkway is installed on standing seam roof using the Pisko Uniseam fastener and tightening clamps. The tightening clamps are inserted into the holes in the fastener (figure 6). The UniSeam fastener is mounted to the snap-lock standing seam roofs on the full side of the seam (Figure 2) and to the Tinsmith standing seam roofs on the folded side of the seam (figure 3). **NB! The bolt of tightening clamp must always be against the fastener, NOT against the seam (figure 9).**

Tightening torque of the fastening bolt is 35 N/m. Correct tightening torque will spread out the tightening clamp a bit, in order to create a tight long-lasting connection (figure 4).

The inclination adjustment plate shall be fixed to the UniSeam fastener by using 2 pcs of M8x16 hexagon bolts and M8 hexagon nuts (figure 6). The inclination adjustment plate is used to adjust the roof walkway to the horizontal level. The most common roof pitches and corresponding holes are shown in the figure 5. The walkway shall be fixed to each inclination adjustment plate by using 2 pcs of M8x16 hexagon bolts and M8 hexagon nuts (figure 7).

The extension of the walkways shall be done by overlapping and securing the connection from both sides with two 8x16 bolts and M8 nuts (figure 8). Max. distance between the fasteners is 1200 mm (figure 1).

Max. protrusion of the walkway from the outermost fastener is 200 mm (figure 1).

At least use 3 fasteners shall be used per continuous length.

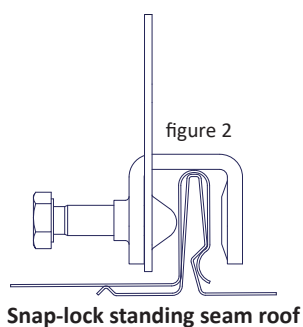


figure 2

Snap-lock standing seam roof




figure 3

Tinsmith standing seam roof

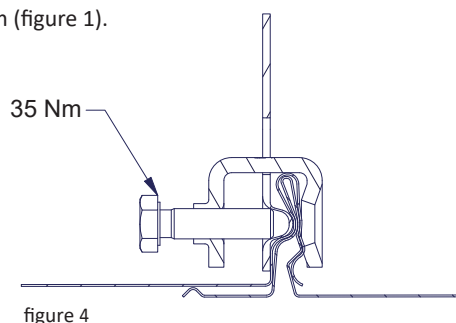


figure 4




figure 9

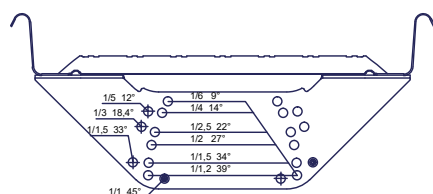


figure 5

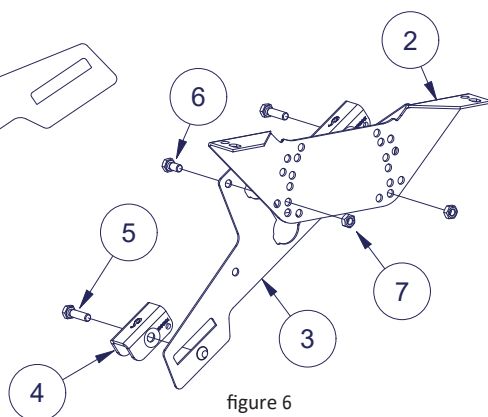


figure 6

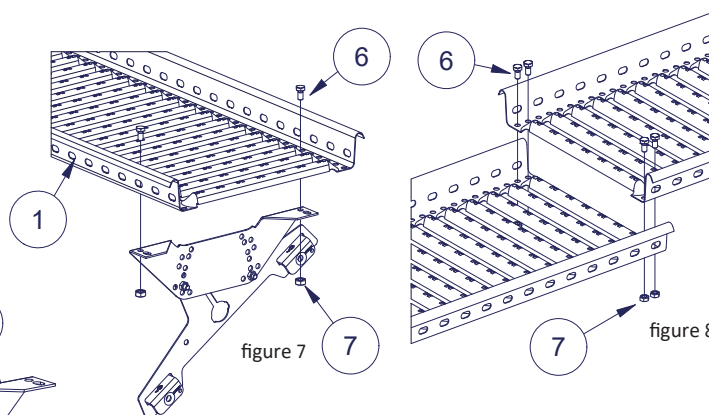


figure 7

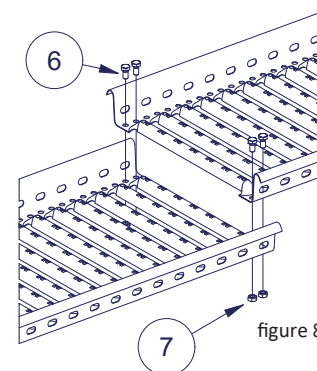


figure 8

Part	Description
1	Roof walkway 350 mm x 3000 mm
2	Inclination adjustment plate
3	SG Fastener, Pisko UniSeam
4	SG Tightening Clamp, Pisko UniSeam
5	Hexagon bolt M8x35, hot-dip galvanized
6	Hexagon bolt M8x16, hot-dip galvanized
7	Hexagon nut M8, hot-dip galvanized

USE

A roof walkway must be used when the roof inclination is more than 1:8. If the height of the building is more than 9 meters, safety rope fixing structures must be provided (Finnish Ministry of the Environment, Decree on the safe use of buildings on January 1, 2018). Standard EN 516 provides two installation options for roof walkways: class 1 and class 2. Using personal fall protection equipment, a person is only allowed to attach themselves to a roof walkway, which is installed in accordance with class 2.

The Pisko roof walkway for standing seam roofs is manufactured in compliance with EN 516 and the roof walkway system has passed the static and dynamic tests specified in the relevant standard for class 2.

A horizontal carriage that moves along the Pisko safety rail or, alternatively, a rope fastener is used as a safety-rope attachment point with Pisko roof walkways (see the separate installation instructions for these products). In addition, when a safety rope is used, the following shall be taken into account:

- Only one user at a time may attach a safety rope to the roof ladder, and the user's total mass, including equipment shall not exceed 150 kg.
- The distance between attachment points must be at least four (4) meters if more than one user is attached to the same roof walkway or horizontal safety rail.
- The safety rope may only be used on the side of the roof where the roof walkway is and in the direction of the eaves.

MAINTENANCE

Pisko products are hard-wearing and safe to use, guaranteed by the ongoing quality control and development work by Piristeel Ltd, as well as correct installation of the products according to the manufacturer's instructions. To ensure the reliability and safety of the products, the property owner must carry out yearly inspection and maintenance procedures, and monitor that the snow load specified by the regulations is not exceeded.

The property owner must have all roof safety products, that have been installed and used according to class 2, and personal safety equipment inspected by a professional authorized by the manufacturer.

Yearly maintenance inspection checklist for Pisko products:

- Check the tightness of joints, connections and attachments.
- Check the roof attachments (fixings).
- Ensure any excessive snow load is cleared to minimize the strain on structures and attachment points (as necessary; there might be a need several times during the winter).
- As necessary, clear the roof walkways of snow and ice.
- Check the paintwork and zinc coating of the products; repair faults and touch up paintwork if necessary
- Replace or repair any damaged or faulty parts as soon as possible.

CE
Piristeel Oy Metallitie 4, 62200 Kauhava Finland 19
EN 516 Pisko Walkway SG Fastener, Pisko UniSeam 1362 Type B Mechanical strength: Class 1 and Class 2 Reaction to fire: Class A1 Durability: Z275 + powder coating 80 µm External fire performance: DTS

This product has been installed by

COMPANY

INSTALLER

☐

According to class 1:

☐

According to class 2: